


CBG-B SERIES, 3-PORT DIRECTIONAL COUPLERS

TECHNICAL FEATURE

FEATURES

- 5 - 2000 MHz
- 10 dB & 20 dB models
- Multi-octave units
- Low profile surface mount package

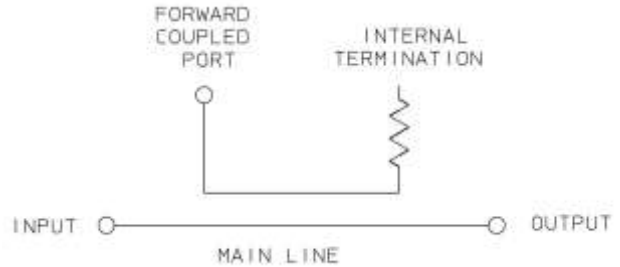

PRINCIPAL SPECIFICATIONS							
Model Number	Frequency Range, MHz	Performance Bandwidth, MHz	□ Coupling dB, Nom.	Frequency Sensitivity, dB, Max.	Directivity, dB, Min.	*Insertion Loss, dB, Max.	VSWR Max.
CBG-10B-375	5 - 750	5 - 750	10 ± 1.0	± 0.5	20	1.3	1.5:1
CBG-20B-375	5 - 750	5 - 750	20 ± 1.0	± 0.75	18	1.0	1.5:1
CBG-11B-1250	100 - 2000	10 - 400	20 ± 1.0	± 0.5	20	0.6	1.3:1
		100 - 2000	11 ± 1.0	± 0.5	15	1.5	1.7:1
CBG-20B-1250	100 - 2000	500 - 1000	11 ± 1.0	± 0.5	15	1.2	1.5:1
		100 - 2000	20 ± 1.0	± 0.5	15	1.5	1.7:1
		500 - 1000	20 ± 1.0	± 0.5	15	1.2	1.5:1


□ Coupling is Referenced to the Input * Insertion Loss excludes Coupling Loss

General Notes:

1. Directional couplers find applications in monitoring of incident and reflected power, sampling for control loops as well as signal injection devices in BITE systems.
2. These Directional Couplers are 3 port devices with one port internally terminated. They also may be used back-to-back as Dual Directional Couplers, or ordered with both coupled ports available, as Bi-Directional Couplers in the CRG-B series.
3. Optional performance characteristics for this series include frequencies up to 2.5 GHz, coupling from 5 to 30 dB, close tolerance coupling and more.

GENERAL SPECIFICATIONS

Impedance: 50 Ω nom.
 CW Input: 1 W max.
 Weight, nominal: 0.1 oz (2.8 g)
 Operating Temperature: -55° to +85°C

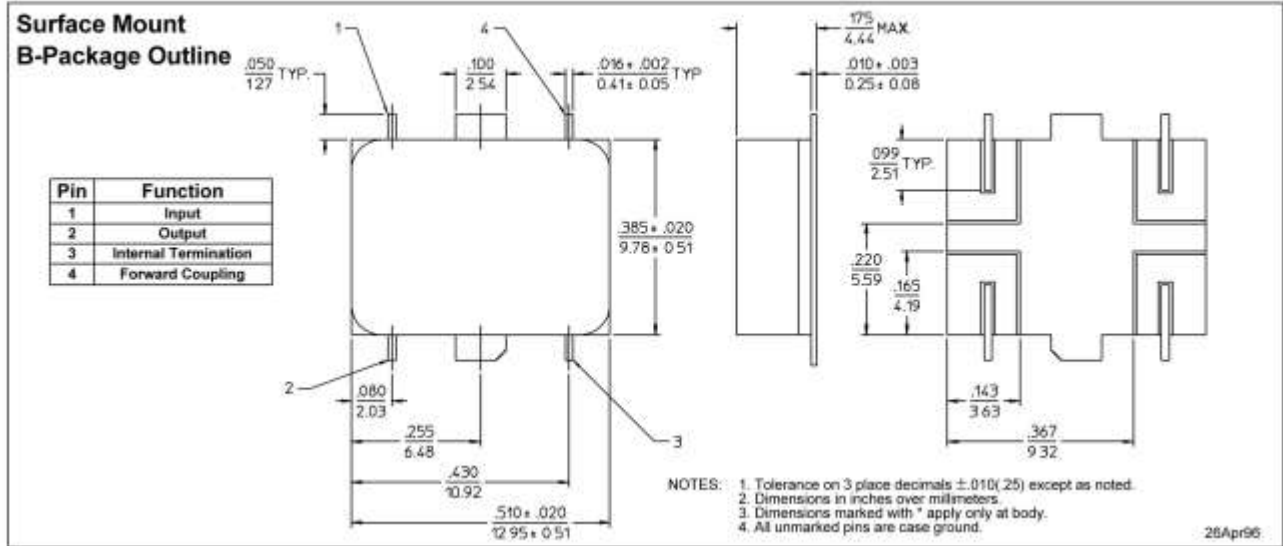

Crane Aerospace & Electronics
 Microwave Solutions – Merrimac Industries
 41 Fairfield Place, West Caldwell, NJ 07006
 + 1.973.575.1300 ext. 1309 • mw@crane-eg.com
www.craneeae.com/mw



CBGB.doc. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2013 Crane Electronics, Inc. All rights reserved.