D3-20003 / 20004 20 dB Directional Couplers

TECHNICAL FEATURE

FEATURES

- 1 to 100 MHz

PERFORMANCE

Frequency Range	1 - 100 MHz
Coupling	20.25 ± 0.1 dB
Coupling Flatness	±0.10 dB max
Insertion Loss	0.25 dB max
Directivity	25 dB min
VSWR	1.15:1 max
Impedance	50 Ohms
Power Handling	3 Watts max
Operating Temperature Range	-54 to +85° C

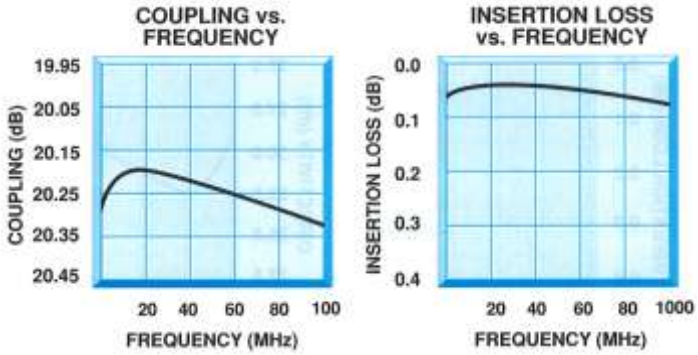

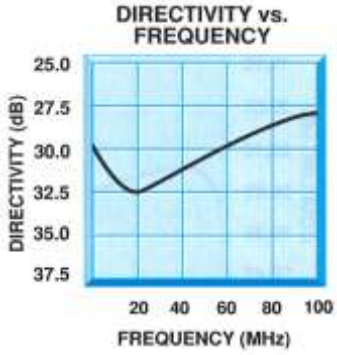

MECHANICAL OUTLINE

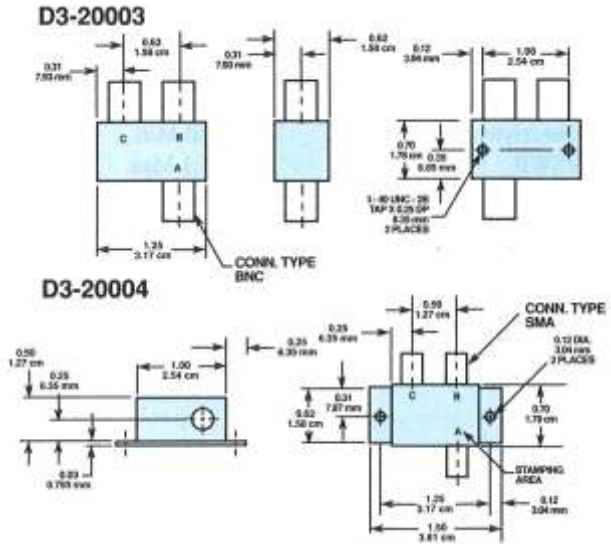

FUNCTIONAL SCHEMATIC



Crane Aerospace & Electronics
Microwave Solutions – Signal Technology
28 Tozer Road, Beverly, MA 01915
+1.978.524.7200 • mw@crane-eg.com
www.craneae.com/mw

DS_D3 20003 20004 Directional Coupler_MW_082505.doc. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2013 Crane Electronics, Inc. All rights reserved.