D3-40007 / 40008

10 to 500 MHz 15 dB Directional Couplers

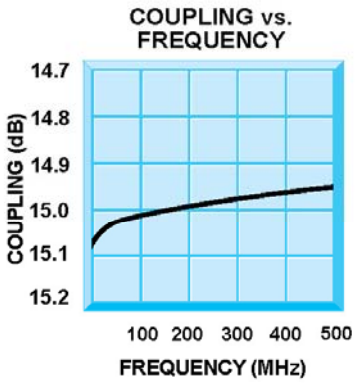

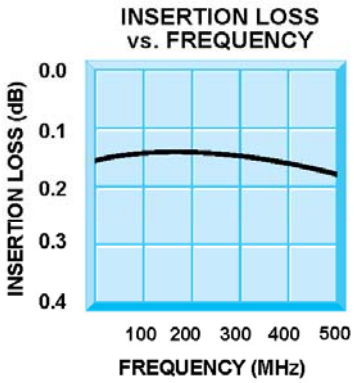

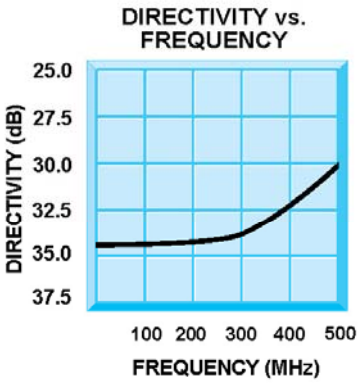

Guaranteed Specifications (-54° to +85°C)

Frequency Range	10 to 500 MHz
Coupling	15 ± 0.2 dB
Coupling Flatness	±0.20 dB Max.
Insertion Loss	0.35 dB Max.
Directivity	25 dB Min.
VSWR	1.2:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Functional Schematic



Mechanical Outline

D3-40007

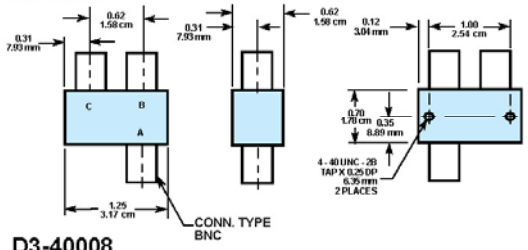

D3-40008

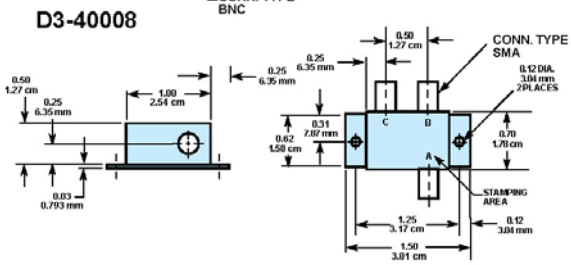

STC Microwave Systems – www.craneae.com
28 Tozer Road • Beverly, MA 01915
phone: 978-524-7200 • email: electronics@craneae.com

Revision D3-40007-40008 2005 08252005

STC MICROWAVE SYSTEMS - OLEKTRON
A CRANE CO. COMPANY
CRANE AEROSPACE & ELECTRONICS