

D4-20005 / 20006 10 dB BI-DIRECTIONAL COUPLERS



TECHNICAL FEATURE

FEATURES


- 0.75 to 75 MHz

PERFORMANCE

Frequency Range.....	0.75 - 75 MHz
Coupling.....	10 ± 0.2 dB
Coupling Flatness.....	±0.2 dB max
Insertion Loss	0.35 dB max
Directivity.....	25 dB min
VSWR.....	1.15:1 max
Impedance.....	50 Ohms
Power Handling	3 Watts max
Operating Temperature Range.....	-54 to +85° C

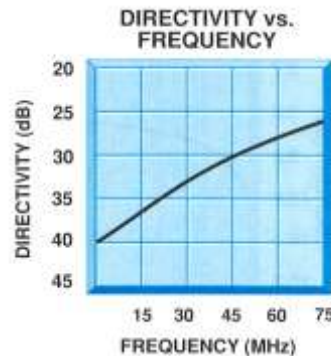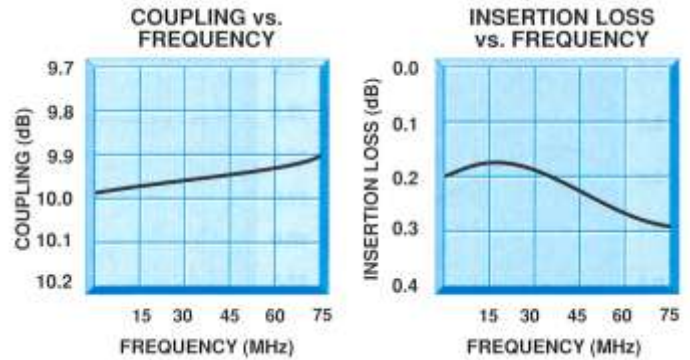

MECHANICAL OUTLINE

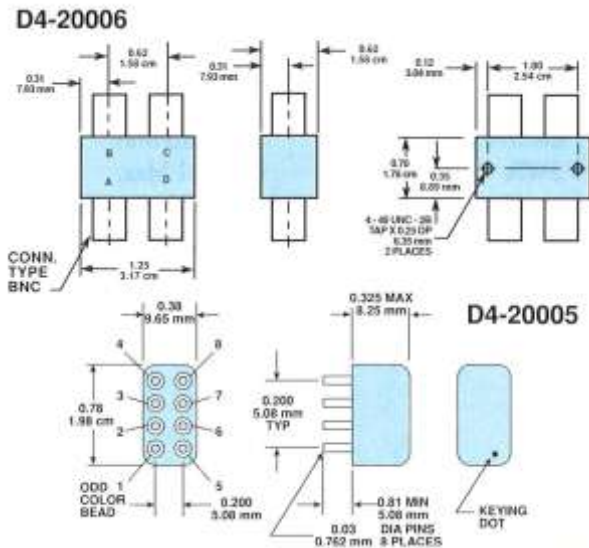

FUNCTIONAL SCHEMATIC

