


# FH-40001 / 40002 / 40003

## 10 to 400 MHz 0°/180° Hybrids

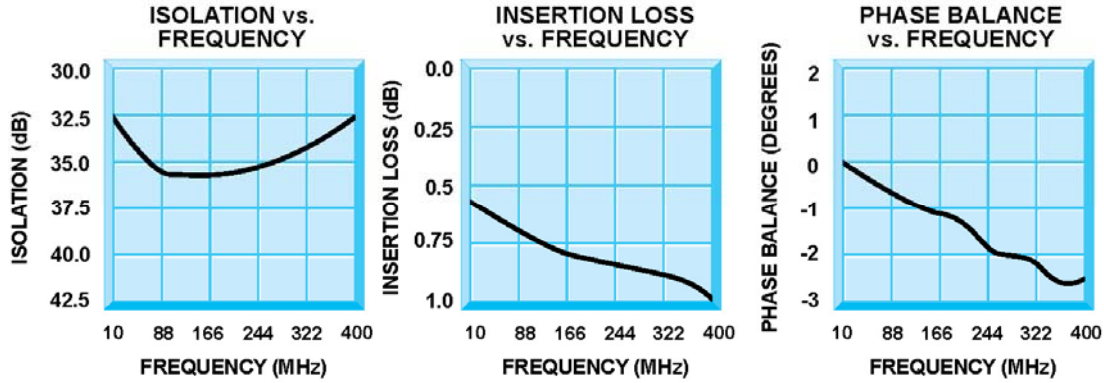


### Guaranteed Specifications (-54° to +85°C)

Frequency Range	10 to 400 MHz
Isolation	25 dB Min.
Insertion Loss	1.25 dB Max.
VSWR	1.3:1 Max.
Phase Balance	±2° Max.
Amplitude Balance	± 0.2 dB Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.


### Mechanical Outline

#### FH-40001


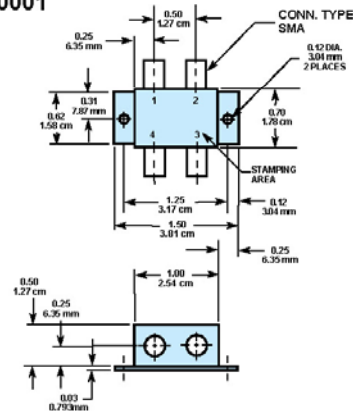


Additional Mechanicals on Next Page

### Functional Schematic



#### FH-40002

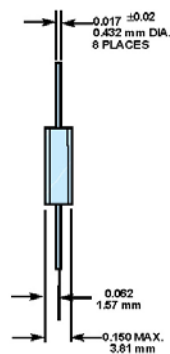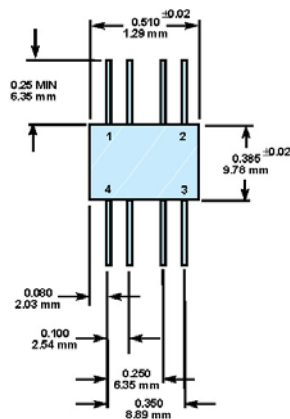

#### FH-40003

