

0° DIVIDERS/COMBINERS - PDG-02B-1005 SQ

TECHNICAL FEATURE

FEATURES

- Space Qualified
- 100 - 2000 MHz
- 2 Way Surface Mount
- Hi-Rel Welded Construction to Pass IR Reflow




PERFORMANCE

Frequency Range.....	100 - 2000 MHz
Isolation.....	15 min., 20 typ. dB
Insertion Loss.....	1.8 max., 1.5 typ. dB
Amplitude Balance.....	0.5 max., 0.3 typ. dB
Phase Balance.....	5° max., 3° typ.
VSWR Input/Output.....	1.6:1 max., 1.4:1 typ.
Input Power.....	1 W max.
Coupling.....	3.0 dB nom.
Impedance.....	50 Ohm nom.
Internal Power Dissipation.....	50 mW max.
Operating Temperature.....	-55° to +85° C

DESCRIPTION

The PDG-02B-1005 SQ surface mount 2 way power dividers/combiners, covers a frequency range of 100 to 2000 MHz using a special lumped element design to reduce the size while maintaining high performance. Unit consists of a welded construction. The surface mount housing has been designed for airborne and space applications where inherent package reliability and hermeticity are critical. Parts, materials and processes in accordance with Merrimac document CENG-0001, "Standard Design Requirements for Space Qualified Devices".

PACKAGE OUTLINE

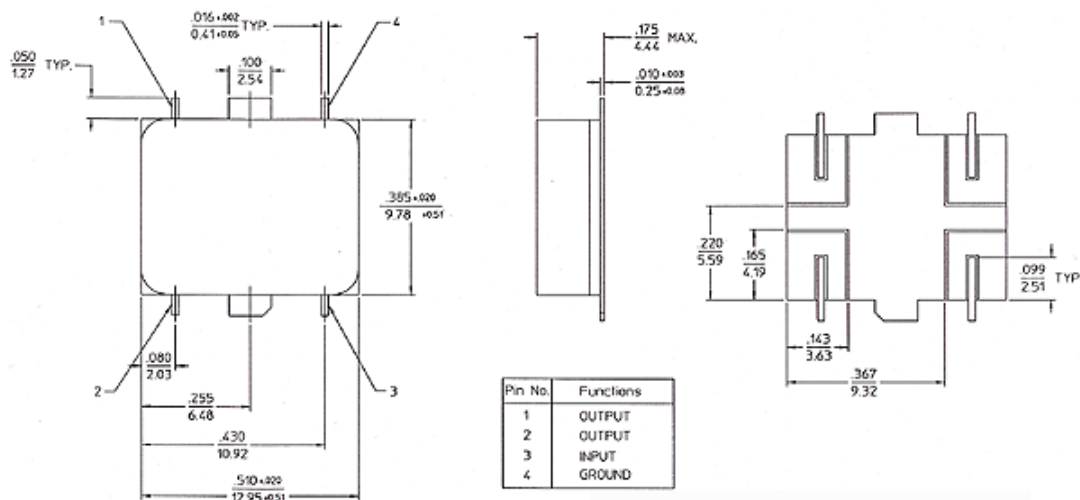

Crane Aerospace & Electronics
 Microwave Solutions – Merrimac Industries
 41 Fairfield Place, West Caldwell, NJ 07006
 + 1.973.575.1300 ext. 1309 • mw@crane-eg.com
 www.craneae.com/mw

PDG-02B-1005 SQ - Rev. 1, 05/07/2001

