

0° DIVIDERS/COMBINERS - PDM-24-11G SQ

TECHNICAL FEATURE

FEATURES

- Space Qualified
- 7 - 15 GHz
- 2 Way SMA




PERFORMANCE

Frequency Range	7 - 15 GHz
Isolation	20 min.
Insertion Loss	0.6 max. dB
Amplitude Balance	0.2 max. dB
VSWR Input/Output.....	1.4:1 in, 1.4:1 out
Phase Balance	$\pm 5^\circ$
CW Input with Load VSWR 1.2:1.....	2 W
Impedance.....	50 Ohm nom.
Operating Temperature	-55° to +85° C

DESCRIPTION

The PDM-24-11G SQ In-Phase Power Divider/Combiner covers 7 - 15 GHz. It uses a conventional Wilkinson design which provides high isolation and low VSWR. This device has been designed in accordance with Merrimac document CENG-0001, "Standard Design Requirements for Space Qualified Devices".

PACKAGE OUTLINE

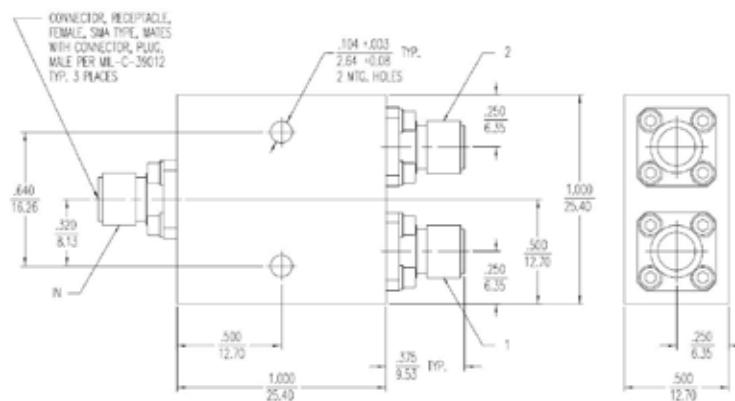

NOTES:
1. TOLERANCE ON 3 PLACE DECIMALS +.020 (.51mm) EXCEPT AS NOTED.
2. DIMENSIONS IN INCHES OVER MILLIMETERS.