

PDM-84G SERIES – 0° POWER DIVIDERS/COMBINERS

TECHNICAL FEATURE

FEATURES

- 2 to 18 GHz
- 8-way
- Uniform Phase & Amplitude Balance
- Low Insertion Loss
- High Isolation
- SMA

PRINCIPAL SPECIFICATIONS											
Model Number	Freq. Range, GHz	Isolation, dB, Min.	Insertion Loss, dB, Max.	Phase Balance, Max.	Amplitude Balance, dB, Max.	VSWR, Max.		CW Power, W, at load VSWR			Outline Dwg.
						In	Out	1.2:1	2.0:1	∞	
PDM-84-5G	2.0 - 8.0	18	1.5	8°	0.5	1.6:1	1.5:1	30	10	1	1
PDM-84-12G	6.0 - 18.0	15	2.0	12°	0.5	1.60:1	1.50:1	30	10	1	2


General Notes:
 1. The PDM-84-G series eight way Power Divider/Combiners covers 2 to 18 GHz using a multi-section stripline Wilkinson design providing high isolation and low VSWR. Etched PTFE fiberglass stripline circuits are encased in an aluminum machined housing that minimizes moding and provides an effective RF shield.

GENERAL SPECIFICATIONS

Impedance: 50 Ω nom.

Weight, nominal:
 PDM-84-5G: 8.5 oz (240 g)
 PDM-84-12G: 6.5 oz (185 g)

Operating Temperature: -55° to +85°C

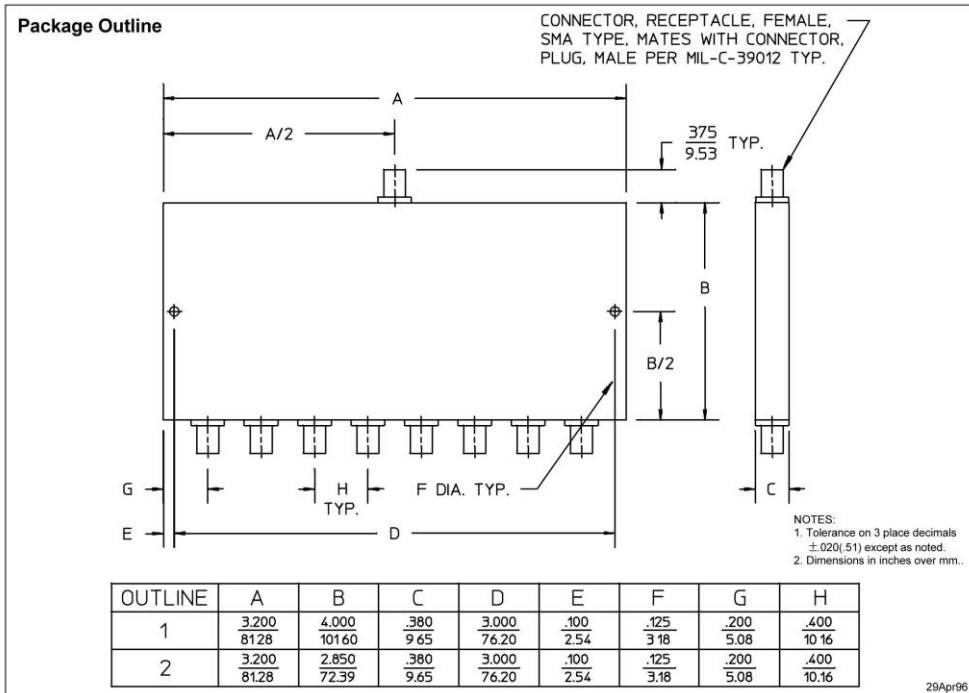

Crane Aerospace & Electronics
 Microwave Solutions – Merrimac Industries
 41 Fairfield Place, West Caldwell, NJ 07006
 + 1.973.575.1300 ext. 1309 • mw@crane-eg.com
www.craneeae.com/mw



PDM84G.doc. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2013 Crane Electronics, Inc. All rights reserved.