

PDML-80A SERIES – 0° POWER DIVIDERS/COMBINERS

TECHNICAL FEATURE

FEATURES


- 2 to 1000 MHz
- 8-way
- Uniform Phase & Amplitude Balance
- Low Insertion Loss
- Low Profile Package
- SMA

PRINCIPAL SPECIFICATIONS													
Model Number	Freq. Range, MHz	Freq. Perform., MHz	Isolation, dB		Insertion Loss, dB		Phase Balance		Amplitude Balance, dB		VSWR, Max.		Input Power,*
			Min.	Typ.	Max	Typ.	Max.	Typ.	Max.	Typ.	In	Out	
PDML-80-100	2 - 300	2 - 100	28	30	1.0	0.8	5°	2°	0.5	0.2	1.35:1	1.2:1	3 W
		100 - 300	20	25	2.0	1.5	8°	4°	0.6	0.3	1.5:1	1.3:1	
PDML-80-500	20 - 1000	20 - 1000	20	25	2.5	2.0	8°	4°	0.6	0.3	1.5:1	1.3:1	3W

*CW input power when used as divider with 1.2:1 VSWR_{out}

General Notes:
 1. The PDML-80 series of 8-way In-Line Power Dividers/Combiners, covers 2 to 1000 MHz using a lumped element design for minimum insertion loss.

GENERAL SPECIFICATIONS
 Coupling: – 9 dB nom.
 Impedance: 50 Ω nom.
 Internal Load Dissipation: 250 mW, max.
 Weight, nominal: 2.5 oz. (70 g)
 Operating Temperature: – 55° to +85°C

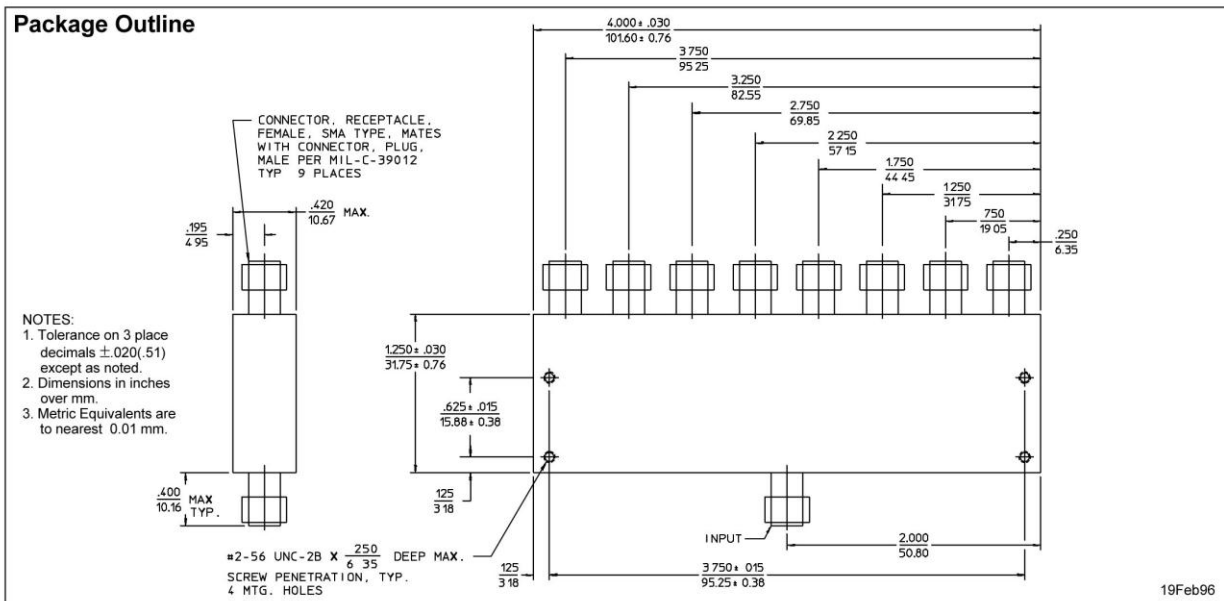

Crane Aerospace & Electronics
 Microwave Solutions – Merrimac Industries
 41 Fairfield Place, West Caldwell, NJ 07006
 + 1.973.575.1300 ext. 1309 • mw@crane-eg.com
www.craneeae.com/mw



PDML80.doc. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2013 Crane Electronics, Inc. All rights reserved.