

PDNL-40 SERIES – 0° POWER DIVIDERS/COMBINERS

TECHNICAL FEATURE

FEATURES

- 5 to 2000 MHz
- 4-way
- Medium Power
- Low Insertion Loss
- Wide Bandwidth
- N-Type Package

<i>PRINCIPAL SPECIFICATIONS</i>												
Model Number	Frequency Range, MHz	Isolation, dB		Insertion Loss, dB		Phase Balance, Max. Typ.		Amplitude Bal., dB		VSWR, (In/Output) Max. Typ.		Weight oz.(g) Nom.
		Min. Typ.	Max. Typ.	Max. Typ.	Typ.	Max. Typ.	Typ.	Max. Typ.	Typ.			
PDNL-40-500	100 - 1000	20	25	1.5	1.0	5°	3°	0.5	0.3	1.5:1	1.3:1	9.5 (269)


General Notes:

1. The PDNL-40 series of In-Line 4-way Power Dividers/ Combiners covers 100 - 1000 MHz. Each uses a high performance lumped element design to achieve multi-octave bandwidths. Standard units are generally available from stock but close tolerance versions are available.

GENERAL SPECIFICATIONS

Nominal Coupling: – 6 dB
 Impedance: 50 Ω nom.
 CW Input Power: 5W max.
 (When used as divider with 1.2:1 VSWR_{out})
 Internal Load Dissipation: 250 mW max.
 Operating Temperature: – 55° to +85°C

Package Outline

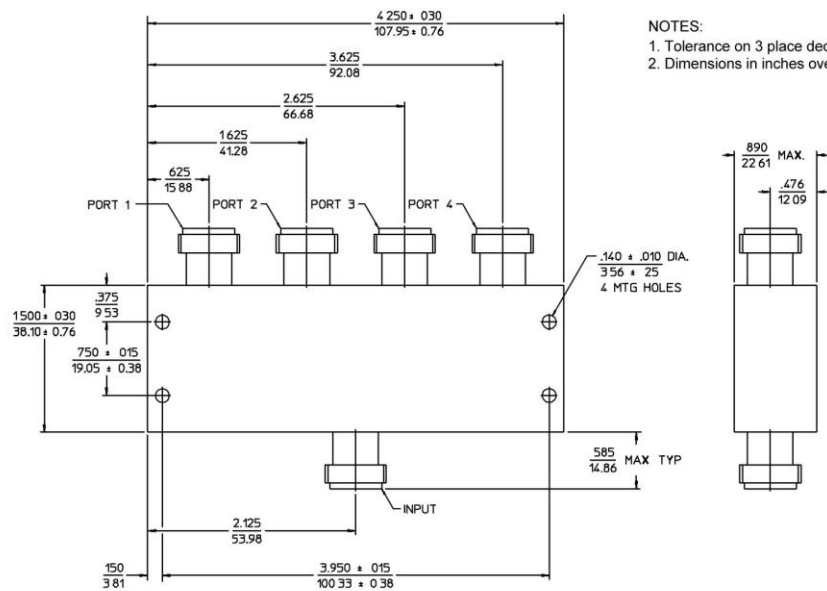

22Feb96

Crane Aerospace & Electronics
 Microwave Solutions – Merrimac Industries
 41 Fairfield Place, West Caldwell, NJ 07006
 + 1.973.575.1300 ext. 1309 • mw@crane-eg.com
www.craneeae.com/mw



PDNL40.doc. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2013 Crane Electronics, Inc. All rights reserved.