

PDT-30-50 – 0° POWER DIVIDERS/COMBINERS

TECHNICAL FEATURE


FEATURES

- 1 to 100 MHz
- 3-way
- High Output Isolation
- Low Insertion Loss
- Broadband
- TO-5 Package

PRINCIPAL SPECIFICATIONS

Model Number	Frequency Range, MHz	Frequency Performance, MHz	Isolation, dB		Insertion Loss, dB		Phase Balance, °		Amplitude Balance		VSWR (In/Output)	
			Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.	Max.	Typ.
PDT-30-50	1 - 100	1 - 100	30	32	0.5	0.3	2°	1°	0.2	0.1	1.3:1	1.15:1

Package Outline

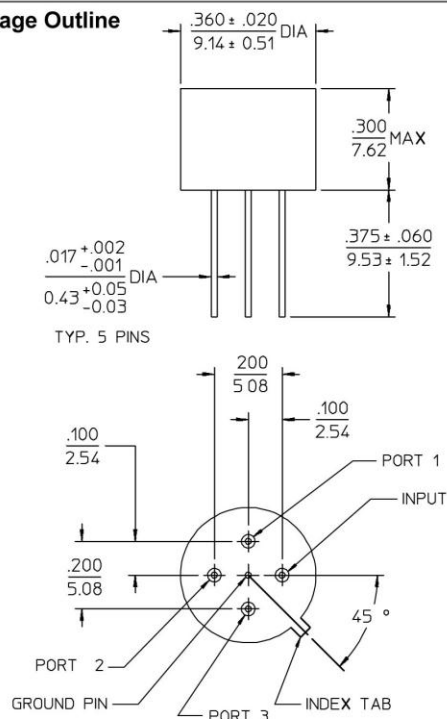

NOTES: 1. Tolerance on 3 place decimals $\pm 0.10(25)$ except as noted.
2. Dimensions in inches over millimeters.

GENERAL SPECIFICATIONS

Coupling:	- 4.8 dB nom.
Impedance:	50 Ω nom.
Internal Power Dissip.:	50 mW
Average Power:	1 Watt max.
Package Type:	TO-5
Weight, nominal:	0.1 oz. (2.8 g)
Operating Temperature:	- 55° to +85°C

General Notes:

1. The PDT-30-50 3-way Power Divider/Combiner covers a broad frequency range from 1 to 100 MHz using a special lumped element design to reduce the size to a minimum.
2. This design is suitable for those applications where high performance and minimum size is essential.

19Feb96

Crane Aerospace & Electronics

Microwave Solutions – Merrimac Industries
41 Fairfield Place, West Caldwell, NJ 07006
+ 1.973.575.1300 ext. 1309 • mw@crane-eg.com
www.craneae.com/mw

PDT3050.doc. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors.
We reserve the right to make changes in products or specifications without notice. Copyright © 2013 Crane Electronics, Inc. All rights reserved.

