

D4-50001 20dB BI-DIRECTIONAL COUPLER

D4-50001


10 to 1000 MHz 20 dB Bi-Directional Coupler




Guaranteed Specifications (-54° to +85°C)

Frequency Range	10 to 1000 MHz
Coupling	20.25 ± 0.5 dB
Coupling Flatness	±0.5 dB Max.
Insertion Loss	0.75 dB Max.
Directivity	20 dB
VSWR	1.25:1 Max.
Impedance	50 Ohms
Power Handling	3 Watts Max.

Mechanical Outline

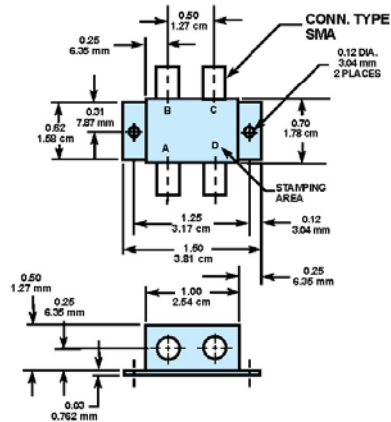

Functional Schematic



STC Microwave Systems – www.cranae.com
 28 Tozer Road • Beverly, MA 01915
 phone: 978-524-7200 • email: electronics@cranae.com

Revision D4-50001 2005 08252005

STC MICROWAVE SYSTEMS - OLEKTRON
 A CRANE CO. COMPANY

