


VOLTAGE CONTROLLED OSCILLATOR 7311 SERIES

TECHNICAL FEATURE

FEATURES

- Low post-tuning drift (PTD)
- Low FM noise
- Output buffer amplifier and filter
- Internal voltage regulation
- Hermetically sealed

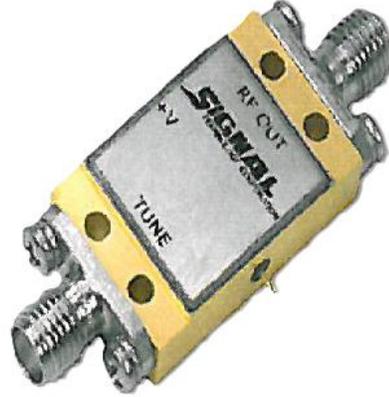

Frequency Range (Note 1)	3.0 to 6.0	GHz
Tuning Bandwidth	13	%, max.
Power Output	+10	dBm, nom.
Post Tuning Drift (1 μ S to 10 S)	\pm 1.5	MHz, max.
Harmonics	-40	dBc, max.
Phase Noise (SSB) @ 100 kHz offset	-90	dBc/Hz, typ.
Bias Pushing	700	kHz/V, max.
Load Pulling (1.5:1 VSWR)	\pm 20	MHz max.
Tuning Voltage Range (Note 2)	0 +12	V min. V max.
Tuning Linearity	1.6:1	MHz, max.
DC Power: +12 V	80	mA typ.
Frequency Stability	\pm 15	
Temperature Range	-54 to +85	$^{\circ}$ C
RF and Tuning Connectors	Removable SMA Female	
DC Connector	Solder Pin	
Dimensions	0.65 x 1.05 x 0.25	Inches

Note 1: The bandwidth of a VCO within the Frequency Range is limited to the maximum percentage Tuning Bandwidth indicated.

Crane Aerospace & Electronics

Microwave Solutions – Signal Technology
 340 North Roosevelt Avenue, Chandler, AZ 85226
 +1.480.961.6269 • mw@crane-eq.com
www.craneae.com/mw

