


Biphase Modulator - BPF-2A-1.7 SQ

TECHNICAL FEATURE

FEATURES

- Space Qualified
- High Accuracy
- Hi-Rel Hermetic Flatpack



PERFORMANCE

RF Frequency.....	1.7 ± 0.1 MHz
Phase Balance	180° ± 2° max.
Amplitude Balance	0.2 dB max.
Insertion Loss.....	3 dB max.
VSWR RF/LO	1.5:1 max.
Carrier Suppression.....	-40 dBc min.


GENERAL SPECIFICATIONS

Impedance.....	50 Ohm
RF Input Level.....	-3dB max.
Switching Speed	2 nS Typ.
Data Levels:	
Logic 1:	+15 mA
Logic 0:	-15 mA
Operating Temperature.....	-55° to +85° C
Weight.....	0.1 oz (2.8G) max.

DESCRIPTION

This unit has been designed, manufactured and qualified per Merrimac document CENG-0001, "Standard Design Requirements for Space Qualified Devices".

PACKAGE OUTLINE

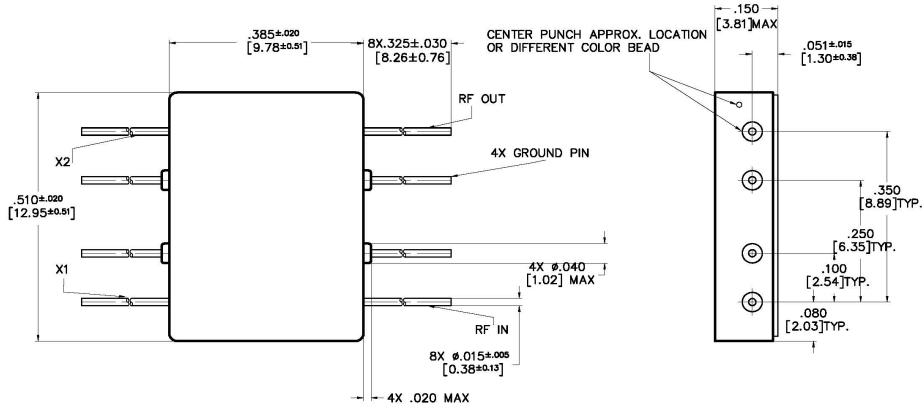

- NOTES
1. Tolerance on 3 places decimals .010(.25) except as noted.
 2. Dimensions in inches over millimeters.
 3. Lead dimensions apply only at body.
 4. All unmarked pins are case ground.

Crane Aerospace & Electronics
 Microwave Solutions – Merrimac Industries
 41 Fairfield Place, West Caldwell, NJ 07006
 + 1.973.575.1300 ext. 1309 • mw@crane-eg.com
 www.craneae.com/mw

BPF-2A-1.7 SQ



This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2012 Crane Electronics, Inc. All rights reserved.