

# QUAD HYBRID - QHDZ-2BH-0.33G SQ

## TECHNICAL FEATURE

### FEATURES

- 225 - 400 MHz
- Space Qualified
- Multiple Plating Options
- High Isolation
- Excellent Phase / Amplitude Balance
- High Power Handling
- Low Loss
- Surface Mount
- Tape & Reel Available



### PERFORMANCE

Frequency Range .....	225 - 400 MHz
Isolation .....	20 dB min.
Insertion Loss .....	0.20 dB max.
VSWR.....	1.20:1 max.
Amplitude Balance .....	±0.4 dB max.
Phase Balance .....	90 ± 3° max.
Input Power .....	125 watts max.
RF Interface.....	Surface mount
Operating Temperature Range .....	-55 to +95°C


### DESCRIPTION

The Multi-Mix® Zapper® QHDZ series provides a 3 dB 90° coupling with low insertion loss, low VSWR, and high isolation. Accurate phase and amplitude balance make this series ideal for use in IQ networks, power amplifiers, radio transceivers, receiver multicouplers and RF signal distribution and processing equipment.

QHDZ quad hybrids are fusion bonded multilayer stripline devices. The fusion bonding process yields a homogeneous monolithic dielectric structure with reliability, ruggedness, and electrical performance that is superior to conventional adhesive bonding techniques.




Parts, materials and processes are in accordance with Merrimac document CENG-0001 "Standard Design Requirements for Space Qualified Devices".

## PACKAGE OUTLINE / TAPE & REEL ORIENTATION

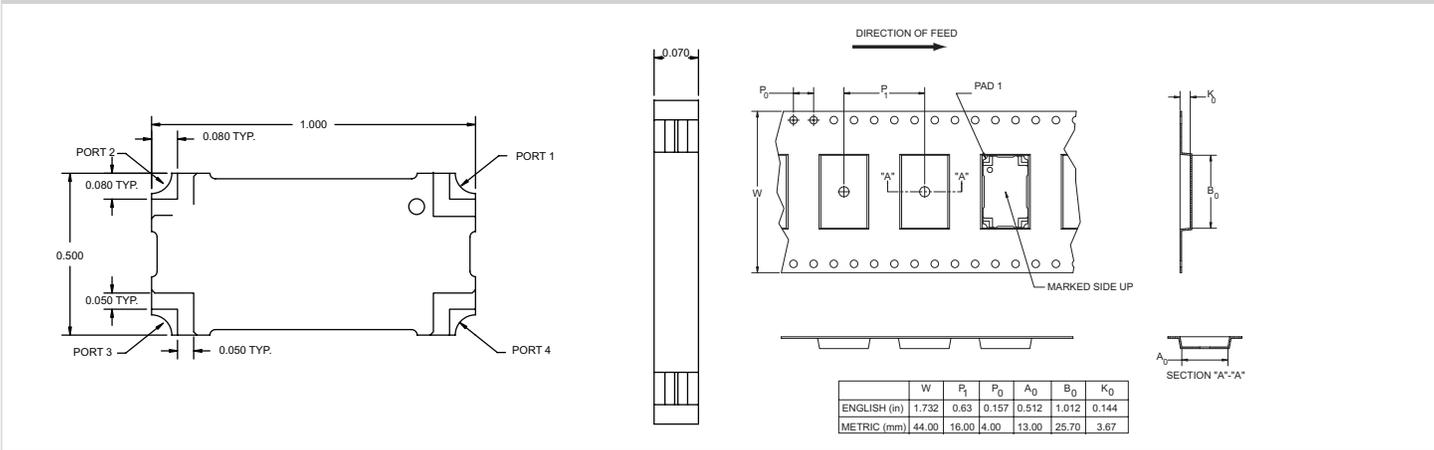


# QUAD HYBRID - QHDZ-2BH-0.33G SQ

## PERFORMANCE DATA

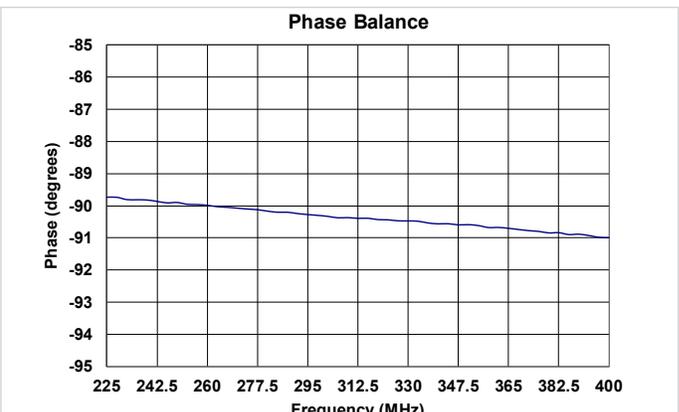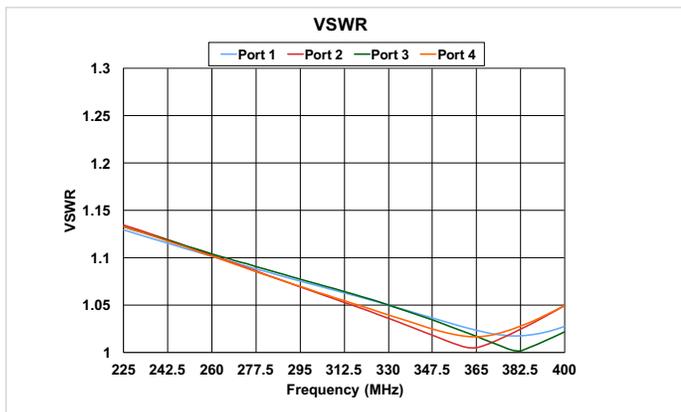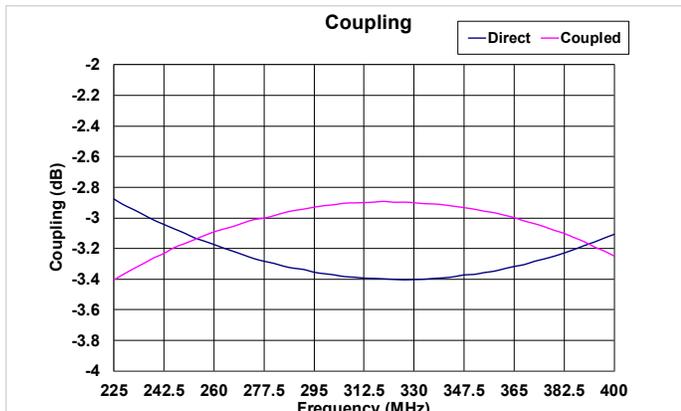

## MOUNTING GUIDELINES

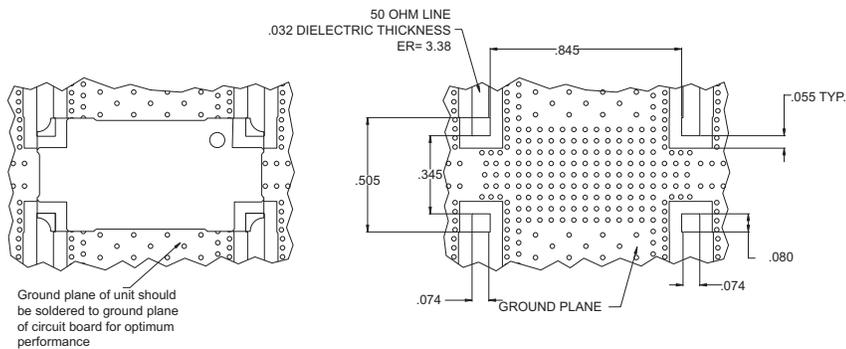

## TRUTH TABLE

	1	2	3	4
1	Input	Iso	-90°	0°
2	Iso	Input	0°	-90°
3	-90°	0°	Input	Iso
4	0°	-90°	Iso	Input