

QUAD HYBRID - QHDZ-2H-1.6G SQ

TECHNICAL FEATURE

FEATURES

- 1200 - 2000 MHz
- High Isolation
- Space Qualified
- Low Loss
- Multiple Plating Options
- Surface Mount
- Excellent Phase / Amplitude Balance
- Tape & Reel Available



PERFORMANCE

Frequency Range.....	1200 - 2000 MHz
.....	1350 - 1850 MHz
Isolation	20 dB min.
.....	23 dB min.
Insertion Loss	0.25 dB max.
.....	0.15 dB max.
VSWR.....	1.20:1 max.
.....	1.15:1 max.
Amplitude Balance	±0.40 dB max.
.....	±0.35 dB max.
Phase Balance	90 ± 3° max.
.....	90 ± 2° max.
Input Power	200 watts max.
RF Interface.....	Surface mount
Operating Temperature Range	-55 to +95°C


DESCRIPTION

The Multi-Mix[®] Zapper[®] QHDZ series provides a 3 dB 90° coupling with low insertion loss, low VSWR, and high isolation. Accurate phase and amplitude balance make this series ideal for use in IQ networks, power amplifiers, radio transceivers, receiver multicouplers and RF signal distribution and process-ing equipment.

QHDZ quad hybrids are fusion bonded multilayer stripline devices. The fusion bonding process yields a homogeneous monolithic dielectric structure with reliability, ruggedness, and electrical performance that is superior to conventional adhesive bonding techniques.





Parts, materials and processes are in accordance with Merrimac document CENG-0001 "Standard Design Requirements for Space Qualified Devices".

PACKAGE OUTLINE / TAPE & REEL ORIENTATION

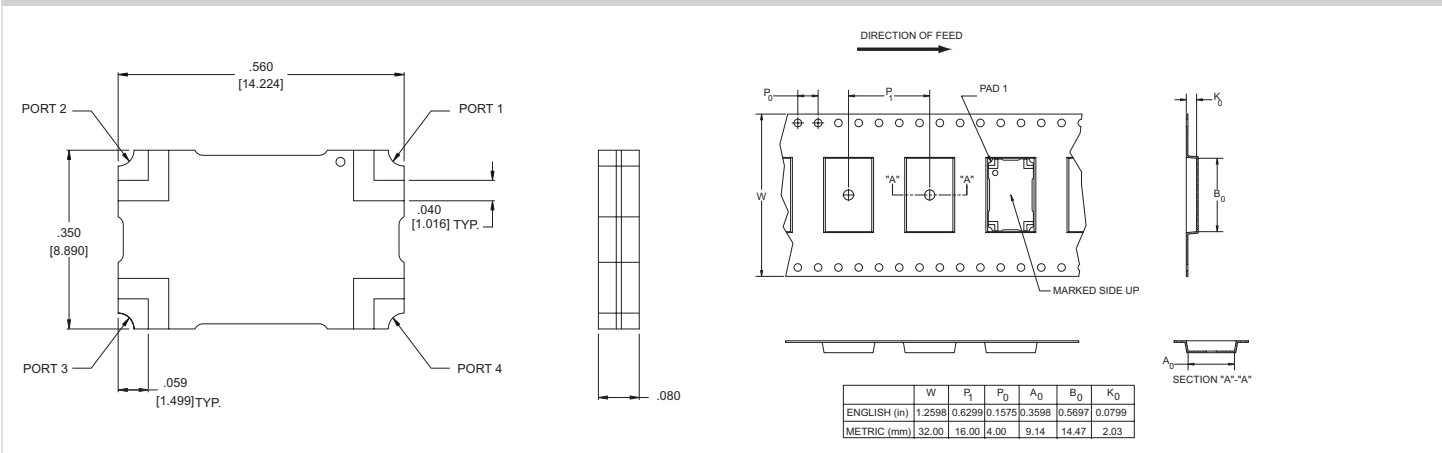


QUAD HYBRID - QHDZ-2H-1.6G SQ

PERFORMANCE DATA

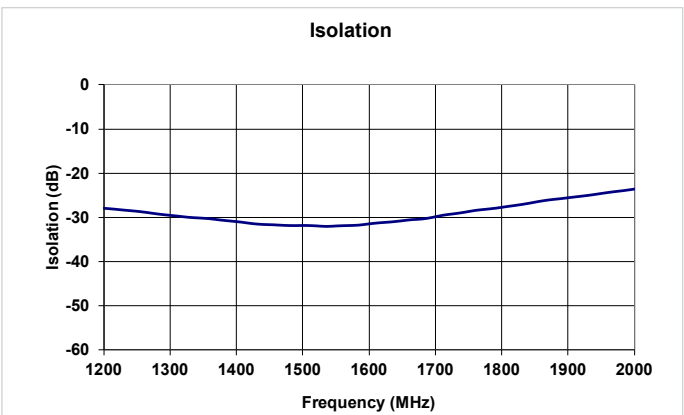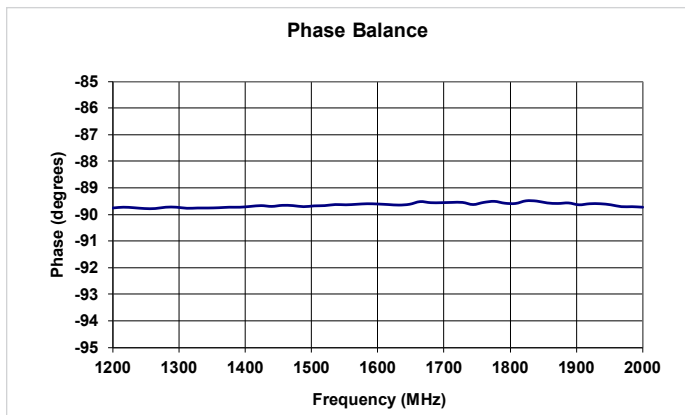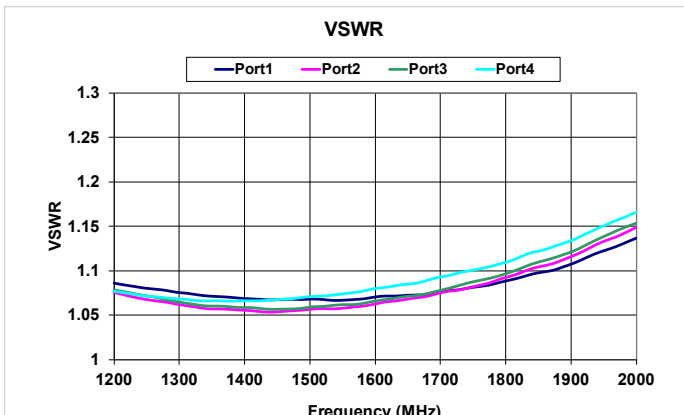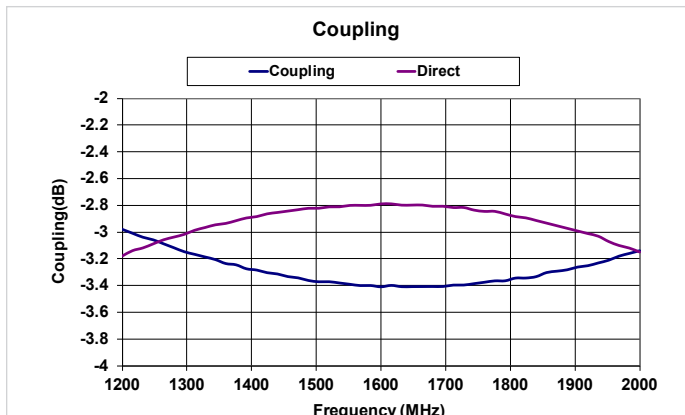

MOUNTING GUIDELINES

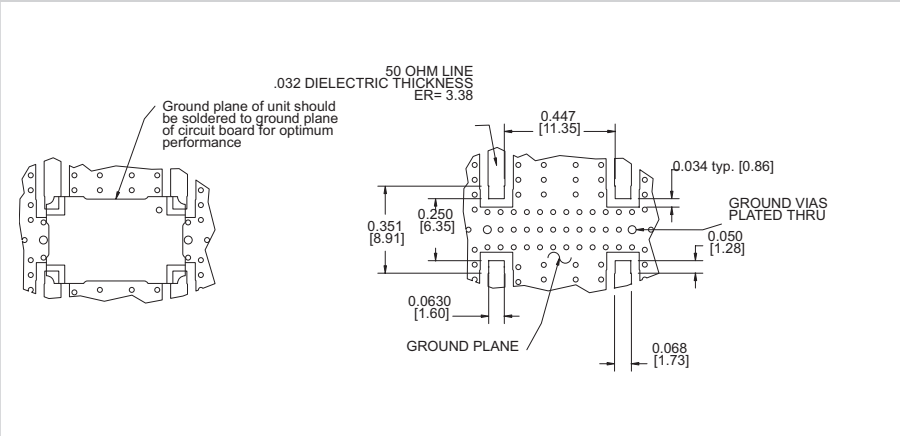

TRUTH TABLE

	1	2	3	4
1	Input	Iso	-90°	0°
2	Iso	Input	0°	-90°
3	-90°	0°	Input	Iso
4	0°	-90°	Iso	Input