

QUAD HYBRID - QHDZ-2N-0.392G

TECHNICAL FEATURE

FEATURES

- 350 - 435 MHz
- High Isolation
- Low Loss
- Excellent Phase / Amplitude Balance
- High Power Handling
- Surface Mount



RoHS Compliant

PERFORMANCE


Frequency Range.....	1700 - 2000, 1805 - 1880 MHz
.....	1930 - 1990 MHz
Isolation	28 dB min.
Insertion Loss	0.15, 0.12, 0.12 dB max.
VSWR.....	1.12:1 max.
Amplitude Balance	±0.2 dB max.
Phase Balance	90 ± 2° max.
Input Power	225 watts max.
RF Interface.....	Surface mount
Operating Temperature Range	-55 to +95°C

DESCRIPTION

The QHDZ-2N-0.392G series is a member of the Multi-Mix Zapper® QHDZ family of 3-dB 90° couplers for use in the 350-435 MHz range. The QHDZ-2N-0.392G exhibits low insertion loss, low VSWR, and high isolation. Excellent phase and amplitude balance and high RF power handling capability make this series ideal for use in base station power amplifiers in particular and radio transceivers, receiver/antenna multicouplers and RF signal distribution and processing equipment in general.





The construction of QHDZ quad hybrids is based on fusion bonded multiplayer stripline structures. The fusion bonding process yields homogeneous monolithic dielectric structures with reliability, ruggedness, and electrical and thermal performance that are superior to conventional adhesive bonding techniques.

PACKAGE OUTLINE / TAPE & REEL ORIENTATION

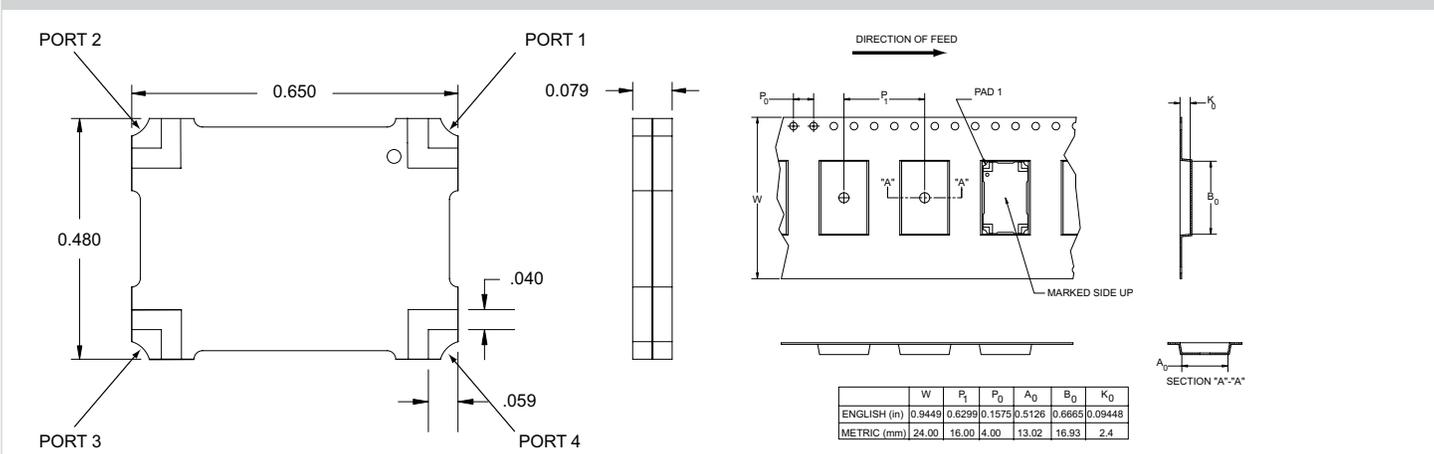


QUAD HYBRID - QHDZ-2N-0.392G

PERFORMANCE DATA

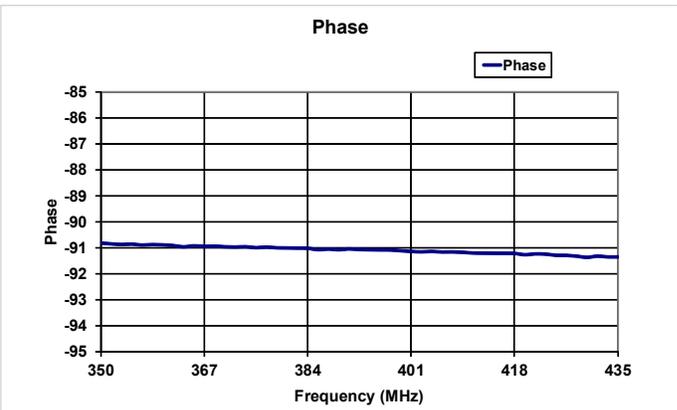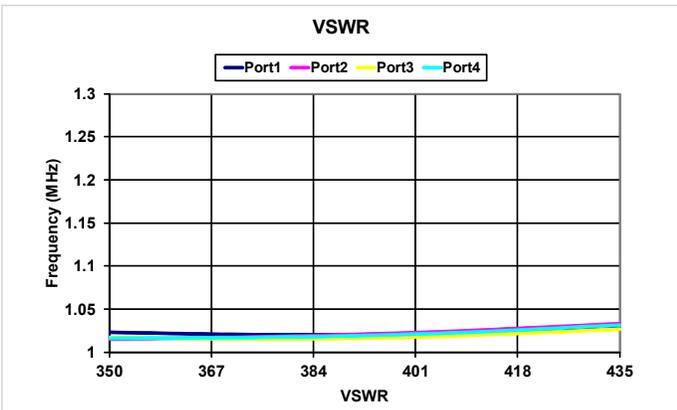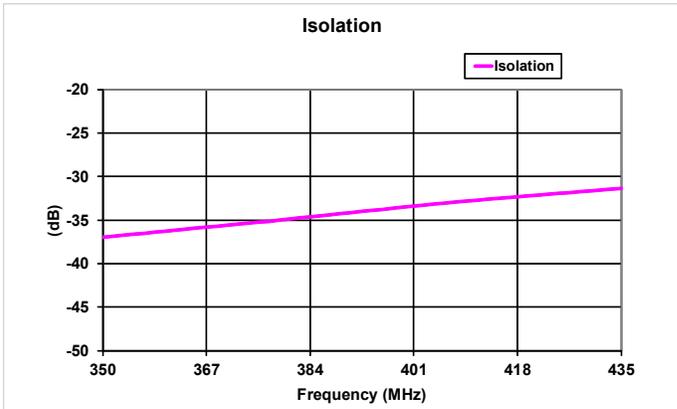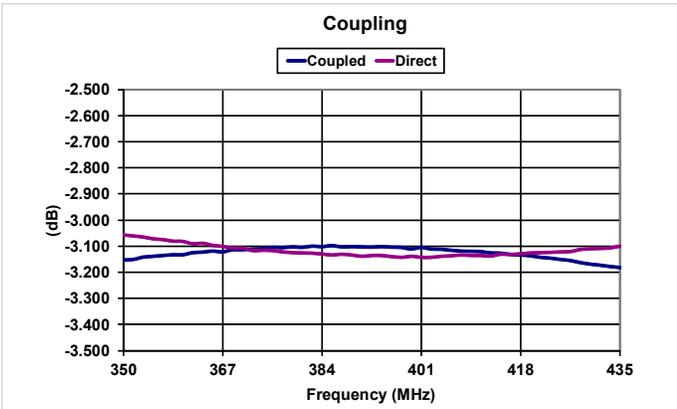

MOUNTING GUIDELINES

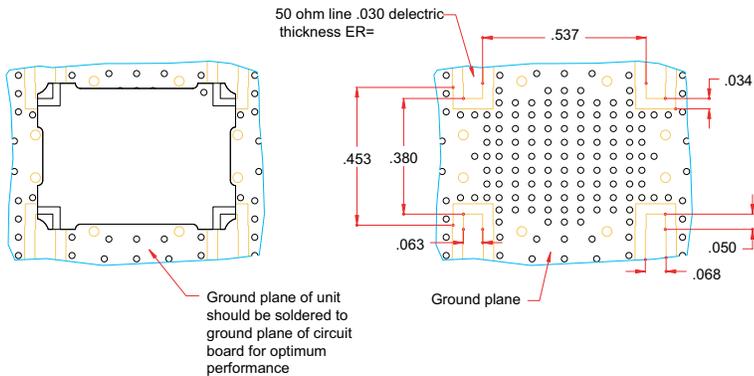

TRUTH TABLE

	1	2	3	4
1	Input	Iso	-90°	0°
2	Iso	Input	0°	-90°
3	-90°	0°	Input	Iso
4	0°	-90°	Iso	Input

DS_Quad_QHDZ2N0392G_101707.indd. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2011 Crane Electronics, Inc. All rights reserved.

