

# QUAD HYBRID - QHDZ-2X-2.5G SQ

## TECHNICAL FEATURE

### FEATURES

- 2.3 - 2.7 GHz
- Low Loss
- Space Qualified
- Low VSWR
- Multiple Plating Options
- Surface Mount
- High Power - 25 Watts CW
- Tape & Reel Available



### PERFORMANCE

Frequency Range.....	2.3 - 2.7 GHz
Isolation.....	20 dB min.
Insertion Loss.....	0.30 dB max.
VSWR.....	1.20:1 max.
Amplitude Balance.....	±0.30 dB max.
Phase Balance.....	90 ± 3° max.
Input Power.....	25 watts max.
RF Interface.....	Surface mount
Operating Temperature Range.....	-55 to +95°C

### DESCRIPTION


The Multi-Mix<sup>®</sup> Zapper<sup>®</sup> QHDZ series provides a 3 dB 90° coupling with low insertion loss, low VSWR, and high isolation. Accurate phase and amplitude balance make this series ideal for use in IQ networks, power amplifiers, radio transceivers, receiver multicouplers and RF signal distribution and process-ing.

QHDZ quad hybrids are fusion bonded multilayer stripline devices. The fusion bonding process yields a homogeneous monolithic dielectric structure with reliability, ruggedness, and electrical performance that is superior to conventional adhesive bonding techniques.

Parts, materials and processes are in accordance with Merrimac document CENG-0001 "Standard Design Requirements for Space Qualified Devices".





Beginning 05/02/13, individual units will not be marked, but tape and reel packaging will include the Merrimac part # and date code. Individual units will have an index mark etched as shown on the data sheets.

### PACKAGE OUTLINE / TAPE & REEL ORIENTATION

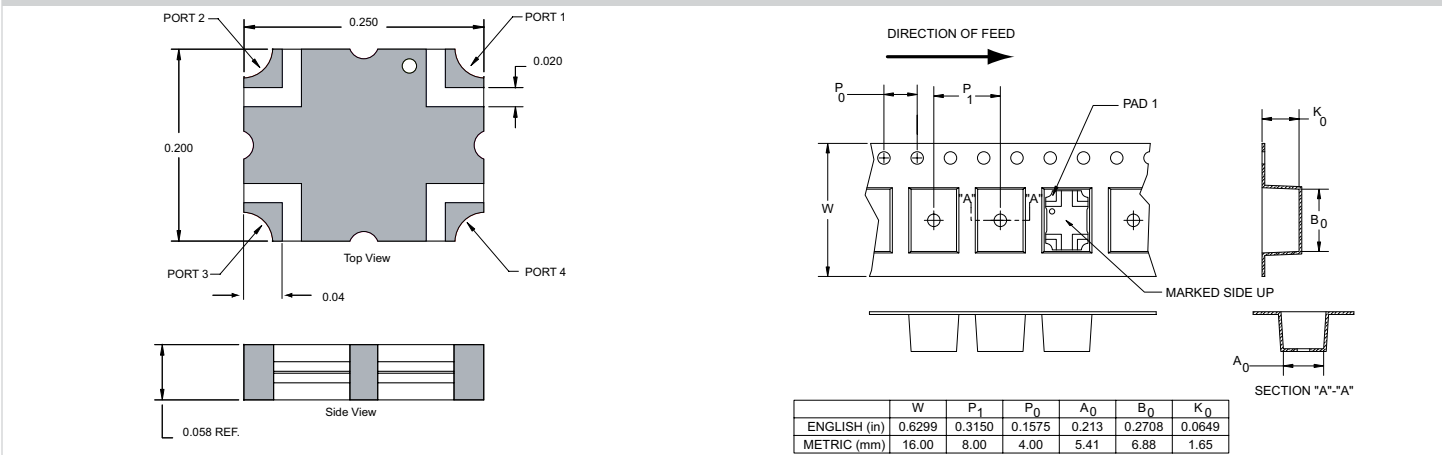


# QUAD HYBRID - QHDZ-2X-2.5G SQ

## PERFORMANCE DATA

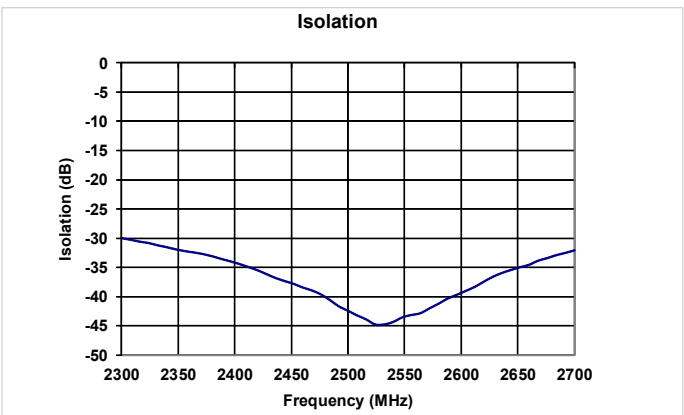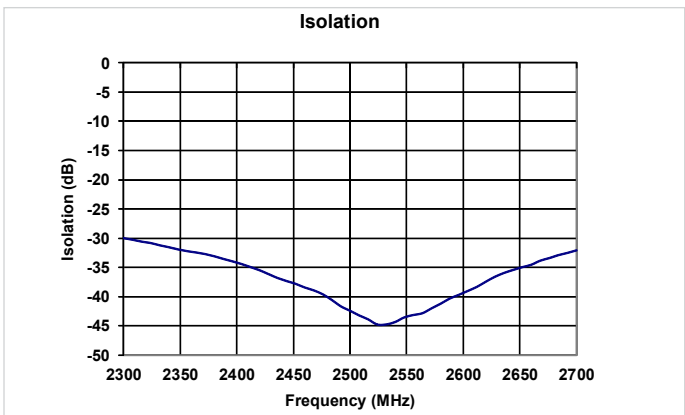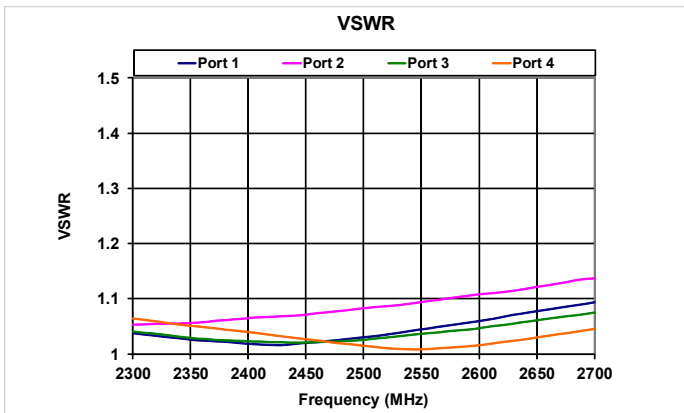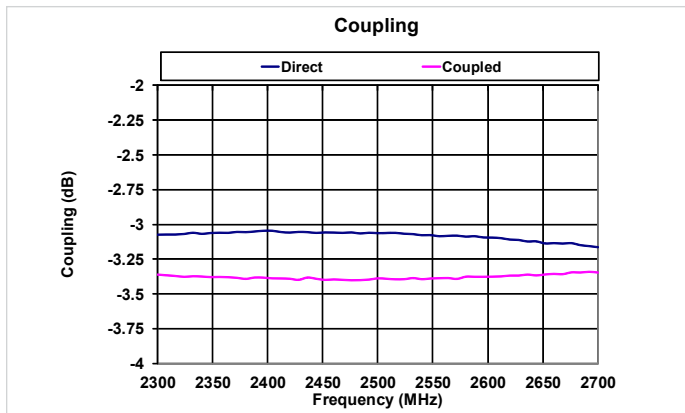

## MOUNTING GUIDELINES

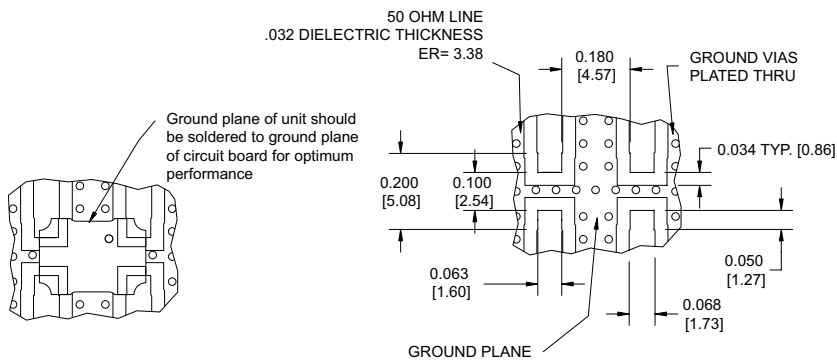

## TRUTH TABLE

TRUTH TABLE				
	1	2	3	4
1	Input	Iso	-90°	0°
2	Iso	Input	0°	-90°
3	-90°	0°	Input	Iso
4	0°	-90°	Iso	Input