

QUAD HYBRID - QHDZ-2X-2.5G

TECHNICAL FEATURE

FEATURES

- 2.3 - 2.7 GHz
- Low Loss
- Low VSWR
- High Power - 25 Watts CW
- Surface Mount
- Tape & Reel Available



PERFORMANCE

Frequency Range.....	2.3 - 2.7 GHz
Isolation.....	20 dB min.
Insertion Loss.....	0.30 dB max.
VSWR.....	1.20:1 max.
Amplitude Balance.....	±0.30 dB max.
Phase Balance.....	90 ± 3° max.
Input Power.....	25 watts max.
RF Interface.....	Surface mount
Operating Temperature Range.....	-55 to +95°C


DESCRIPTION

The Multi-Mix® Zapper® QHDZ series provides a 3 dB 90° coupling with low insertion loss, low VSWR, and high isolation. Accurate phase and amplitude balance make this series ideal for use in IQ networks, power amplifiers, radio transceivers, receiver multicouplers and RF signal distribution and processing.

QHDZ quad hybrids are fusion bonded multilayer stripline devices. The fusion bonding process yields a homogeneous monolithic dielectric structure with reliability, ruggedness, and electrical performance that is superior to conventional adhesive bonding techniques.





Beginning 05/02/13, individual units will not be marked, but tape and reel packaging will include the Merrimac part # and date code. Individual units will have an index mark etched as shown on the data sheets.

PACKAGE OUTLINE / TAPE & REEL ORIENTATION

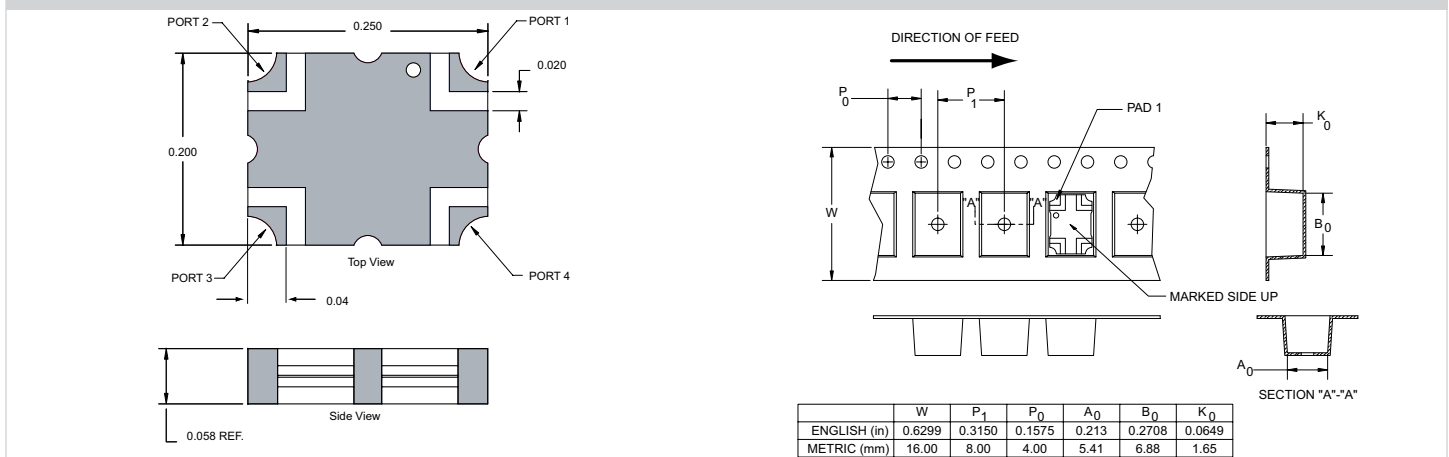


QUAD HYBRID - QHDZ-2X-2.5G

PERFORMANCE DATA

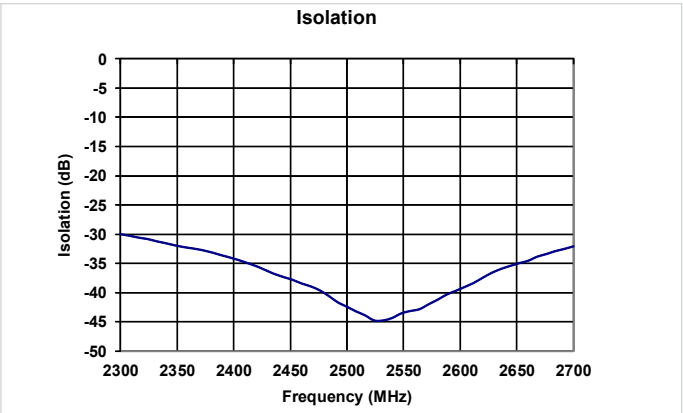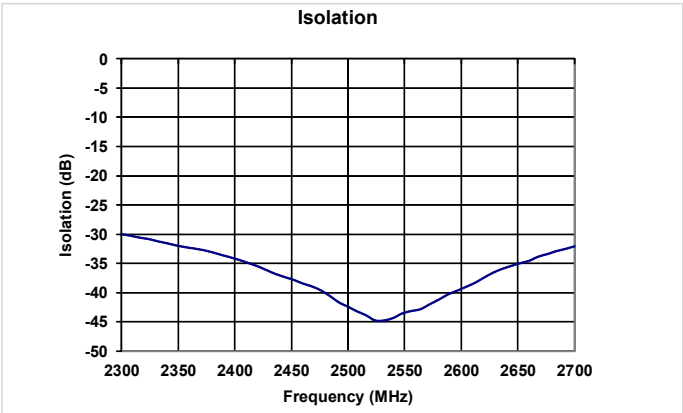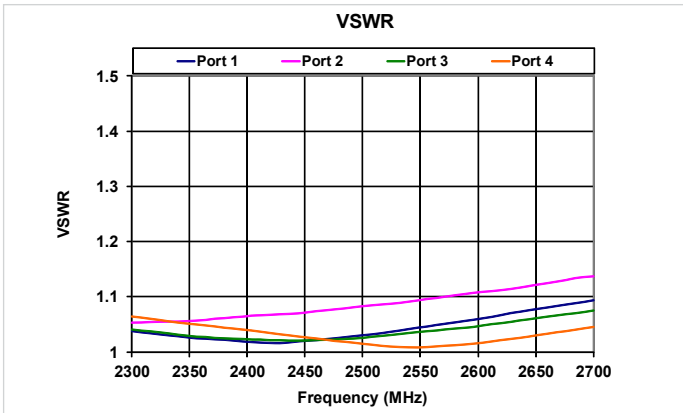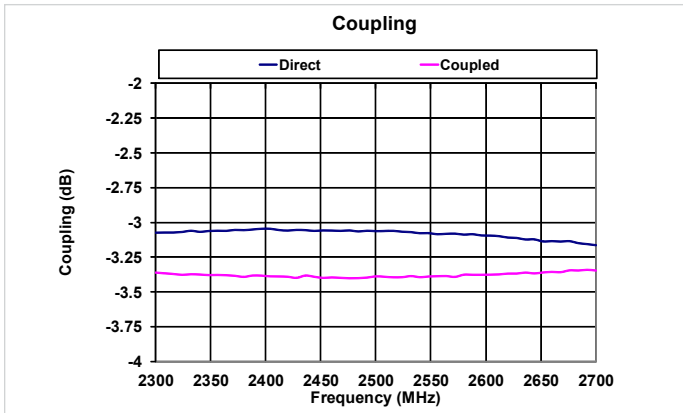

MOUNTING GUIDELINES

TRUTH TABLE

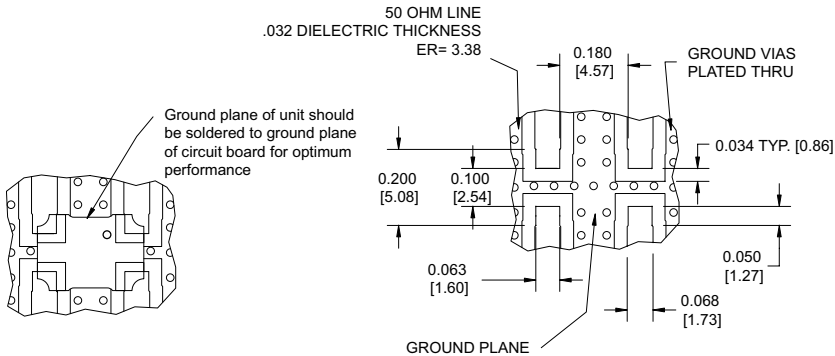

TRUTH TABLE				
	1	2	3	4
1	Input	Iso	-90°	0°
2	Iso	Input	0°	-90°
3	-90°	0°	Input	Iso
4	0°	-90°	Iso	Input

DS_Quad_QHDZ2X25G_052207.indd. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2011 Crane Electronics, Inc. All rights reserved.

