

PDM & PDML-33-12G – 0° POWER DIVIDERS/COMBINERS

TECHNICAL FEATURE


FEATURES

- 6 to 18 GHz
- 3-way
- Excellent Phase & Amplitude Balance
- Low Insertion Loss
- High Isolation
- SMA

<i>PRINCIPAL SPECIFICATIONS</i>											
Model Number	Freq. Range, GHz.	Insertion Loss, dB, Max.	Phase Balance, Max.	Amplitude Balance, dB, Max.	Isolation, dB, Min.	Profile Thickness, In., Max.	Weight, oz. (g) Nom.	CW Input, Max., With VSWR _{out}			
								1.2:1	2.0:1	∞	
PDM-33-12G	6.0 - 18.0	0.7	8°	0.4	20	0.420	2.5(70)	30W	10W	1W	
PDML-33-12G	6.0 - 18.0	0.7	8°	0.4	20	0.250	1.5(43)	30W	10W	1W	

General Notes:
 1. The PDM-33-12 G provides three-way in-phase division of microwave signals in the 6 to 18 GHz range. It is one of a series of *true* multi-way Power Dividers developed to meet the demands of broad-band systems requiring very low insertion loss and high output isolation. It is available in a special low profile version.

GENERAL SPECIFICATIONS
 Input/Output VSWR: 1.4:1 max.
 Impedance: 50 Ω nom.
 Special Welded Version: EMI Screening (Model PDML-33-12GW) >100 dBc
 Operating Temperature: – 55° to + 85°C

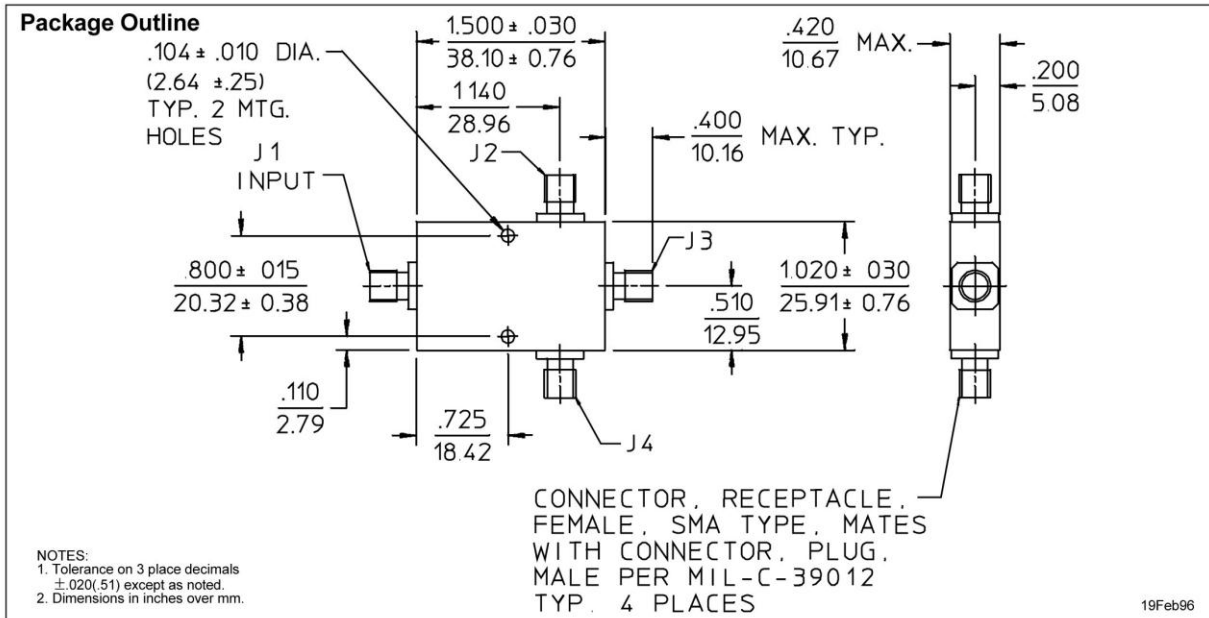

Crane Aerospace & Electronics
 Microwave Solutions – Merrimac Industries
 41 Fairfield Place, West Caldwell, NJ 07006
 + 1.973.575.1300 ext. 1309 • mw@crane-eg.com
www.craneeae.com/mw



PDM3312G.doc. This revision supersedes all previous releases. All technical information is believed to be accurate, but no responsibility is assumed for errors. We reserve the right to make changes in products or specifications without notice. Copyright © 2013 Crane Electronics, Inc. All rights reserved.